
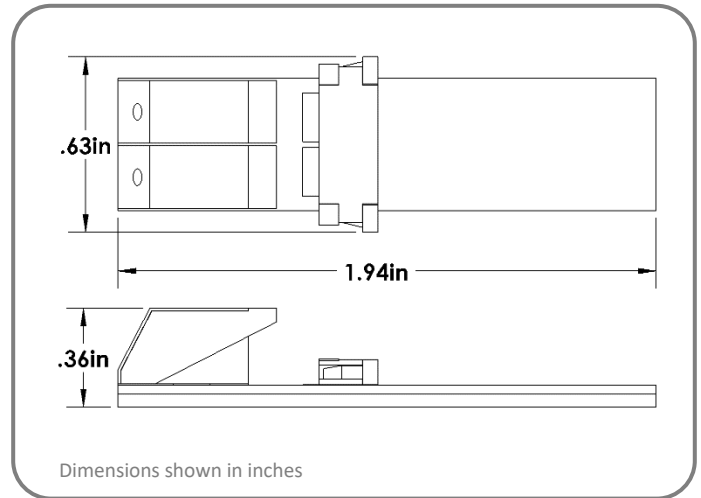


inspired LED **Super-Clip Tiger Paw[®] Connector**

Inspired LED's patented solderless **Tiger Paw[®] Connectors** are the perfect solution for in-field LED system design and customization. These innovative accessories pair with LED flex strips for quick, convenient installation. Now, creating the perfect low-voltage lighting system is easier than ever, thanks to Inspired LED!

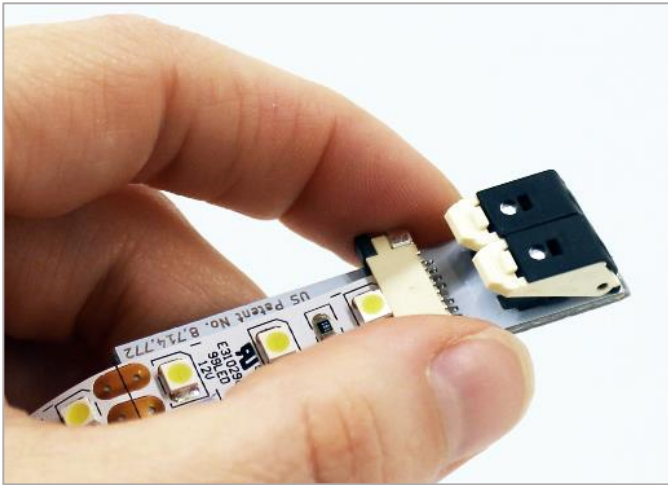

Product Specifications: SKU# 3849

- Solderless termination of 8-10mm 12V or 24V LED flex strips to 16-22 AWG solid or stranded cable
- Max Load- 5 AMPS
- Net Wt. 4g
- VHB adhesive backing included
- Industry proven locking system meets shock and vibration requirements for IEC 60068-2-27
- U.S. Patent No. 8,714,772

Instructions:

- 1** Use scissors to cut LED strip to length along copper solder pads ONLY (located every 3 LEDs).
- 2** Take hold of black sliding latch and pull outward to open.
- 3** Peel back adhesive lining on LED strip about ½ inch.
- 4** Insert flex strip into gap between black sliding latch and beige bridge piece.
- 5** Make sure LED strip is centered and fully inserted before sliding black latch firmly closed and pressing on adhesive.
- 6** Strip 16-22 AWG cable back about ¼ inch, taking note of positive and negative polarity.
- 7** Match polarity of wires to LEDs as marked with +/- signs along the flex strip. Press down on beige levers to insert or release wire.
- 8** Ensure wires are secure and connect to Class 2 DC power, then remove remaining adhesive lining to install.

Troubleshooting: If LEDs are flickering, double check connection to be sure flex is fully inserted and wires properly secured, if no lights turn on check to be sure all polarities are matched

