



Date	SYM	REVISION RECORD	AUTH	DR.	CK.

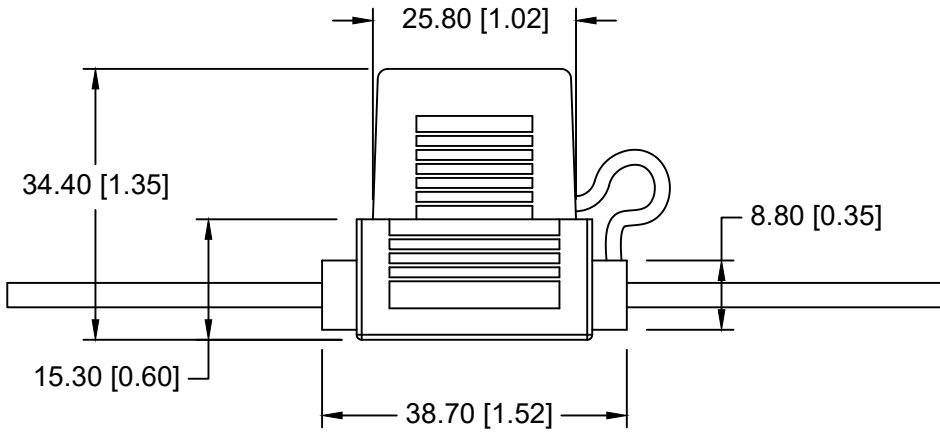

WATER RESISTANT TYPE

NOTES:

- 1. MATERIAL:
HOUSING : PVC ,UL94V-0, FLEX 60GPVC, UL FILE NO. E174939
 - 2. WIRE: RED WIRE, 16 AWG, UL 1015, 600V, 105°C,
FLAME RATED VW-1, UL FILE NO. E250011 OR ENGINEERING
APPROVED EQUIVALENT
 - 3. RATED CURRENT: 30A
 - 4. ACCEPTS ATP/ATC/ATO FUSES
 - 5. INSULATION RESISTANCE AT 500V DC: 100MΩ MIN
 - 6. CONTACT RESISTANCE: 5mΩ AT 1A DC
 - 7. DIELECTRIC STRENGTH FOR 60 SECONDS: AC 1000V MIN
- ROHS 2 COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
		decimal ±.5 (.020)	Approved By T.B.
Fractional ± .8 (.030)	Title INLINE FUSE HOLDER		
Angular ± 3°	Date 12/08/17	Drawing Number BF353	