


PERFORMANCE CHARACTERISTICS

- CURRENT RATING 1.5 A AT 20°C (FULLY LOADED)
- 1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE 500V AC (CONT / CONT)
- OPERATING TEMPERATURE -55°C TO 125°C
- CONTACT RESISTANCE 20 MΩ MAX
- INSERTION FORCE : 0.75 N MAX /CONT
- EXTRACTION FORCE: 0.15 N MIN /CONT
- INSULATION RESISTANCE : 10<sup>4</sup> MΩ MIN

NOTES

- LEAD FREE INDICATOR : LF-LEAD FREE
  - PERFORMANCE LEVEL INDICATOR (REF DWG No. BS,C,201844,003)
- THIS PRODUCT IS CSA APPROVED  
THIS PRODUCT IS UL RECOGNIZED
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS,A,201572,001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

LAY OUT  
P.C.B. -HOLE

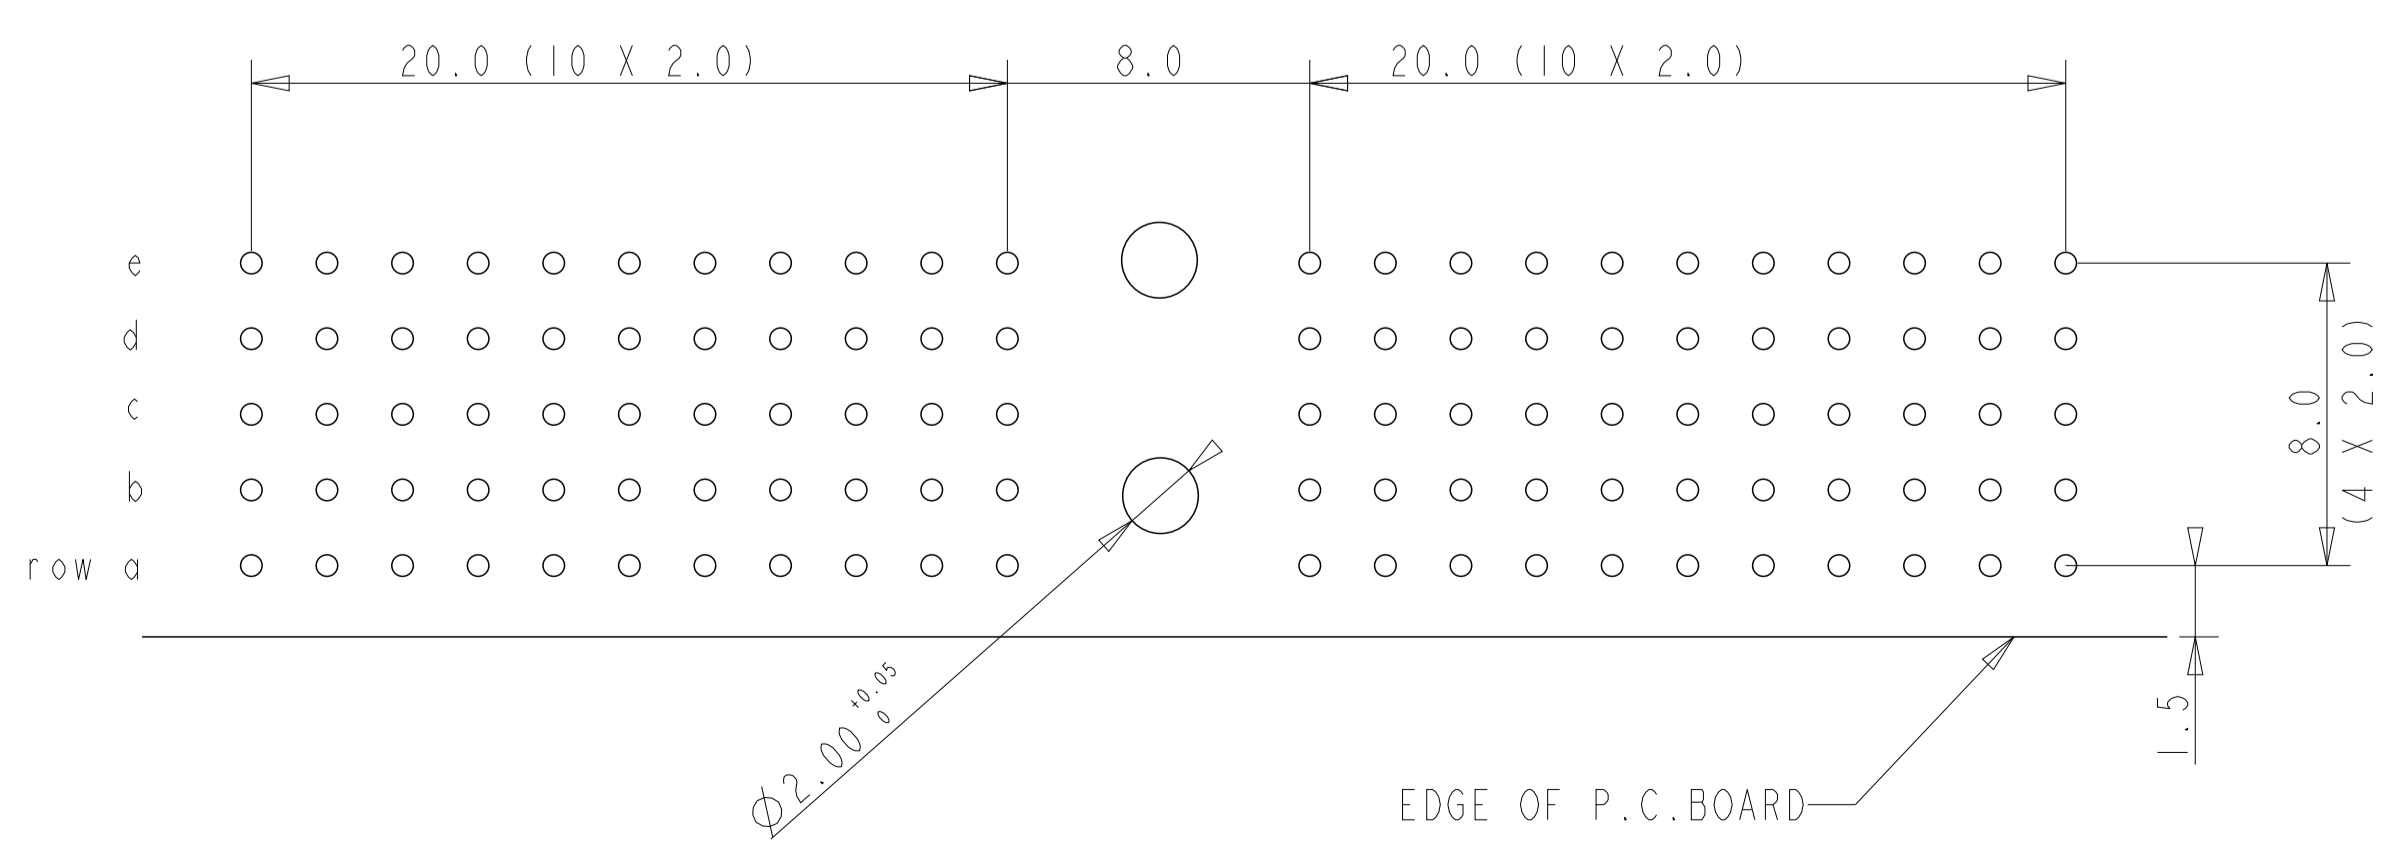

Material		Spec ref	
Ma code	tolerance	projection	
Heat treat	✓	300C ± 0.2 10SEC	↔
Plating/Finish	✓	300C ± 0.1 10SEC	↔
Dr	4 2 92	J.V.B	size
Eng	w.ecadm	20060921	Scale
Chr		20160417	5,000
Appr			ECN
Product family		MILLIPACS	REL Level
Model Name		HM2R01PA5100	Released
Model Revision			
MPACS 5+2R RA RCP		BS,C,201418,001	Rev.
CONN TYPE A			E
Proj/ E file	catalog no	HM2R01PA5100----	CUSTOMER DRAWING
sheet 1 of 1			

FCI CONFIDENTIAL



This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of FCI. Copyright FCI.