

POSITIONS/ CONTACTS	A		B	
	INCH	MM	INCH	MM
02/02	0.100	2.54	0.220	5.58
03/03	0.200	5.08	0.320	8.12
04/04	0.300	7.62	0.420	10.66
05/05	0.400	10.16	0.520	13.20
06/06	0.500	12.70	0.620	15.74
07/07	0.600	15.24	0.720	18.28
08/08	0.700	17.78	0.820	20.82
09/09	0.800	20.32	0.920	23.36
10/10	0.900	22.86	1.020	25.90
11/11	1.000	25.40	1.120	28.44
12/12	1.100	27.94	1.220	30.98
13/13	1.200	30.48	1.320	33.52
14/14	1.300	33.02	1.420	36.06
15/15	1.400	35.56	1.520	38.60
16/16	1.500	38.10	1.620	41.14
17/17	1.600	40.64	1.720	43.68
18/18	1.700	43.18	1.820	46.22
19/19	1.800	45.72	1.920	48.76
20/20	1.900	48.26	2.020	51.30
21/21	2.000	50.80	2.120	53.84
22/22	2.100	53.34	2.220	56.38
23/23	2.200	55.88	2.320	58.92
24/24	2.300	58.42	2.420	61.46
25/25	2.400	60.96	2.520	64.00
26/26	2.500	63.50	2.620	66.54
27/27	2.600	66.04	2.720	69.08
28/28	2.700	68.58	2.820	71.62
29/29	2.800	71.12	2.920	74.16
30/30	2.900	73.66	3.020	76.70
31/31	3.000	76.20	3.120	79.24
32/32	3.100	78.74	3.220	81.78
33/33	3.200	81.28	3.320	84.32
34/34	3.300	83.82	3.420	86.86
35/35	3.400	86.36	3.520	89.40
36/36	3.500	88.90	3.620	91.94
37/37	3.600	91.44	3.720	94.48
38/38	3.700	93.98	3.820	97.02
39/39	3.800	96.52	3.920	99.56
40/40	3.900	99.06	4.020	102.10

PART NUMBER CODING


xPxCxx1LGBN-RC

NUMBER OF POSITIONS
(CONTACTS PER ROW, 02 THRU 40)

PLATING
(.000030" ~ .000050" NICKEL UNDERPLATED)
P = GOLD FLASH OVERALL
T = TIN OVERALL

INSULATOR MATERIAL
P = PBT POLYESTER, UL 94V-0.
PROCESSING TEMP.: WAVE ONLY.
N = NYLON 6T.
*PROCESSING TEMP. = 260° C FOR 10 SECS. MAX.

REVISIONS				
REV.	ECO. NO	DESCRIPTION	DATE	BY
D	1869	ADD CONTACT DEPTH 6.4mm, UPDATE TOP VIEW & TOLERANCE, WIDTH 2.54 WAS 2.4	12/23/2008	JH
E	2055	ADD CONTACT POINT DISTANCE 2.48mm	11/12/2009	LH
F	2164	CORRECT TOP VIEW AND ISO VIEW (PIN HOLE LOCATION) & RIGHT VIEW (.063" DISTANCE)	7/28/2010	LH
G	2516	UPDATE NOTE 10 AND ADD NOTE 11 MATING PARTS	02/14/2012	LH

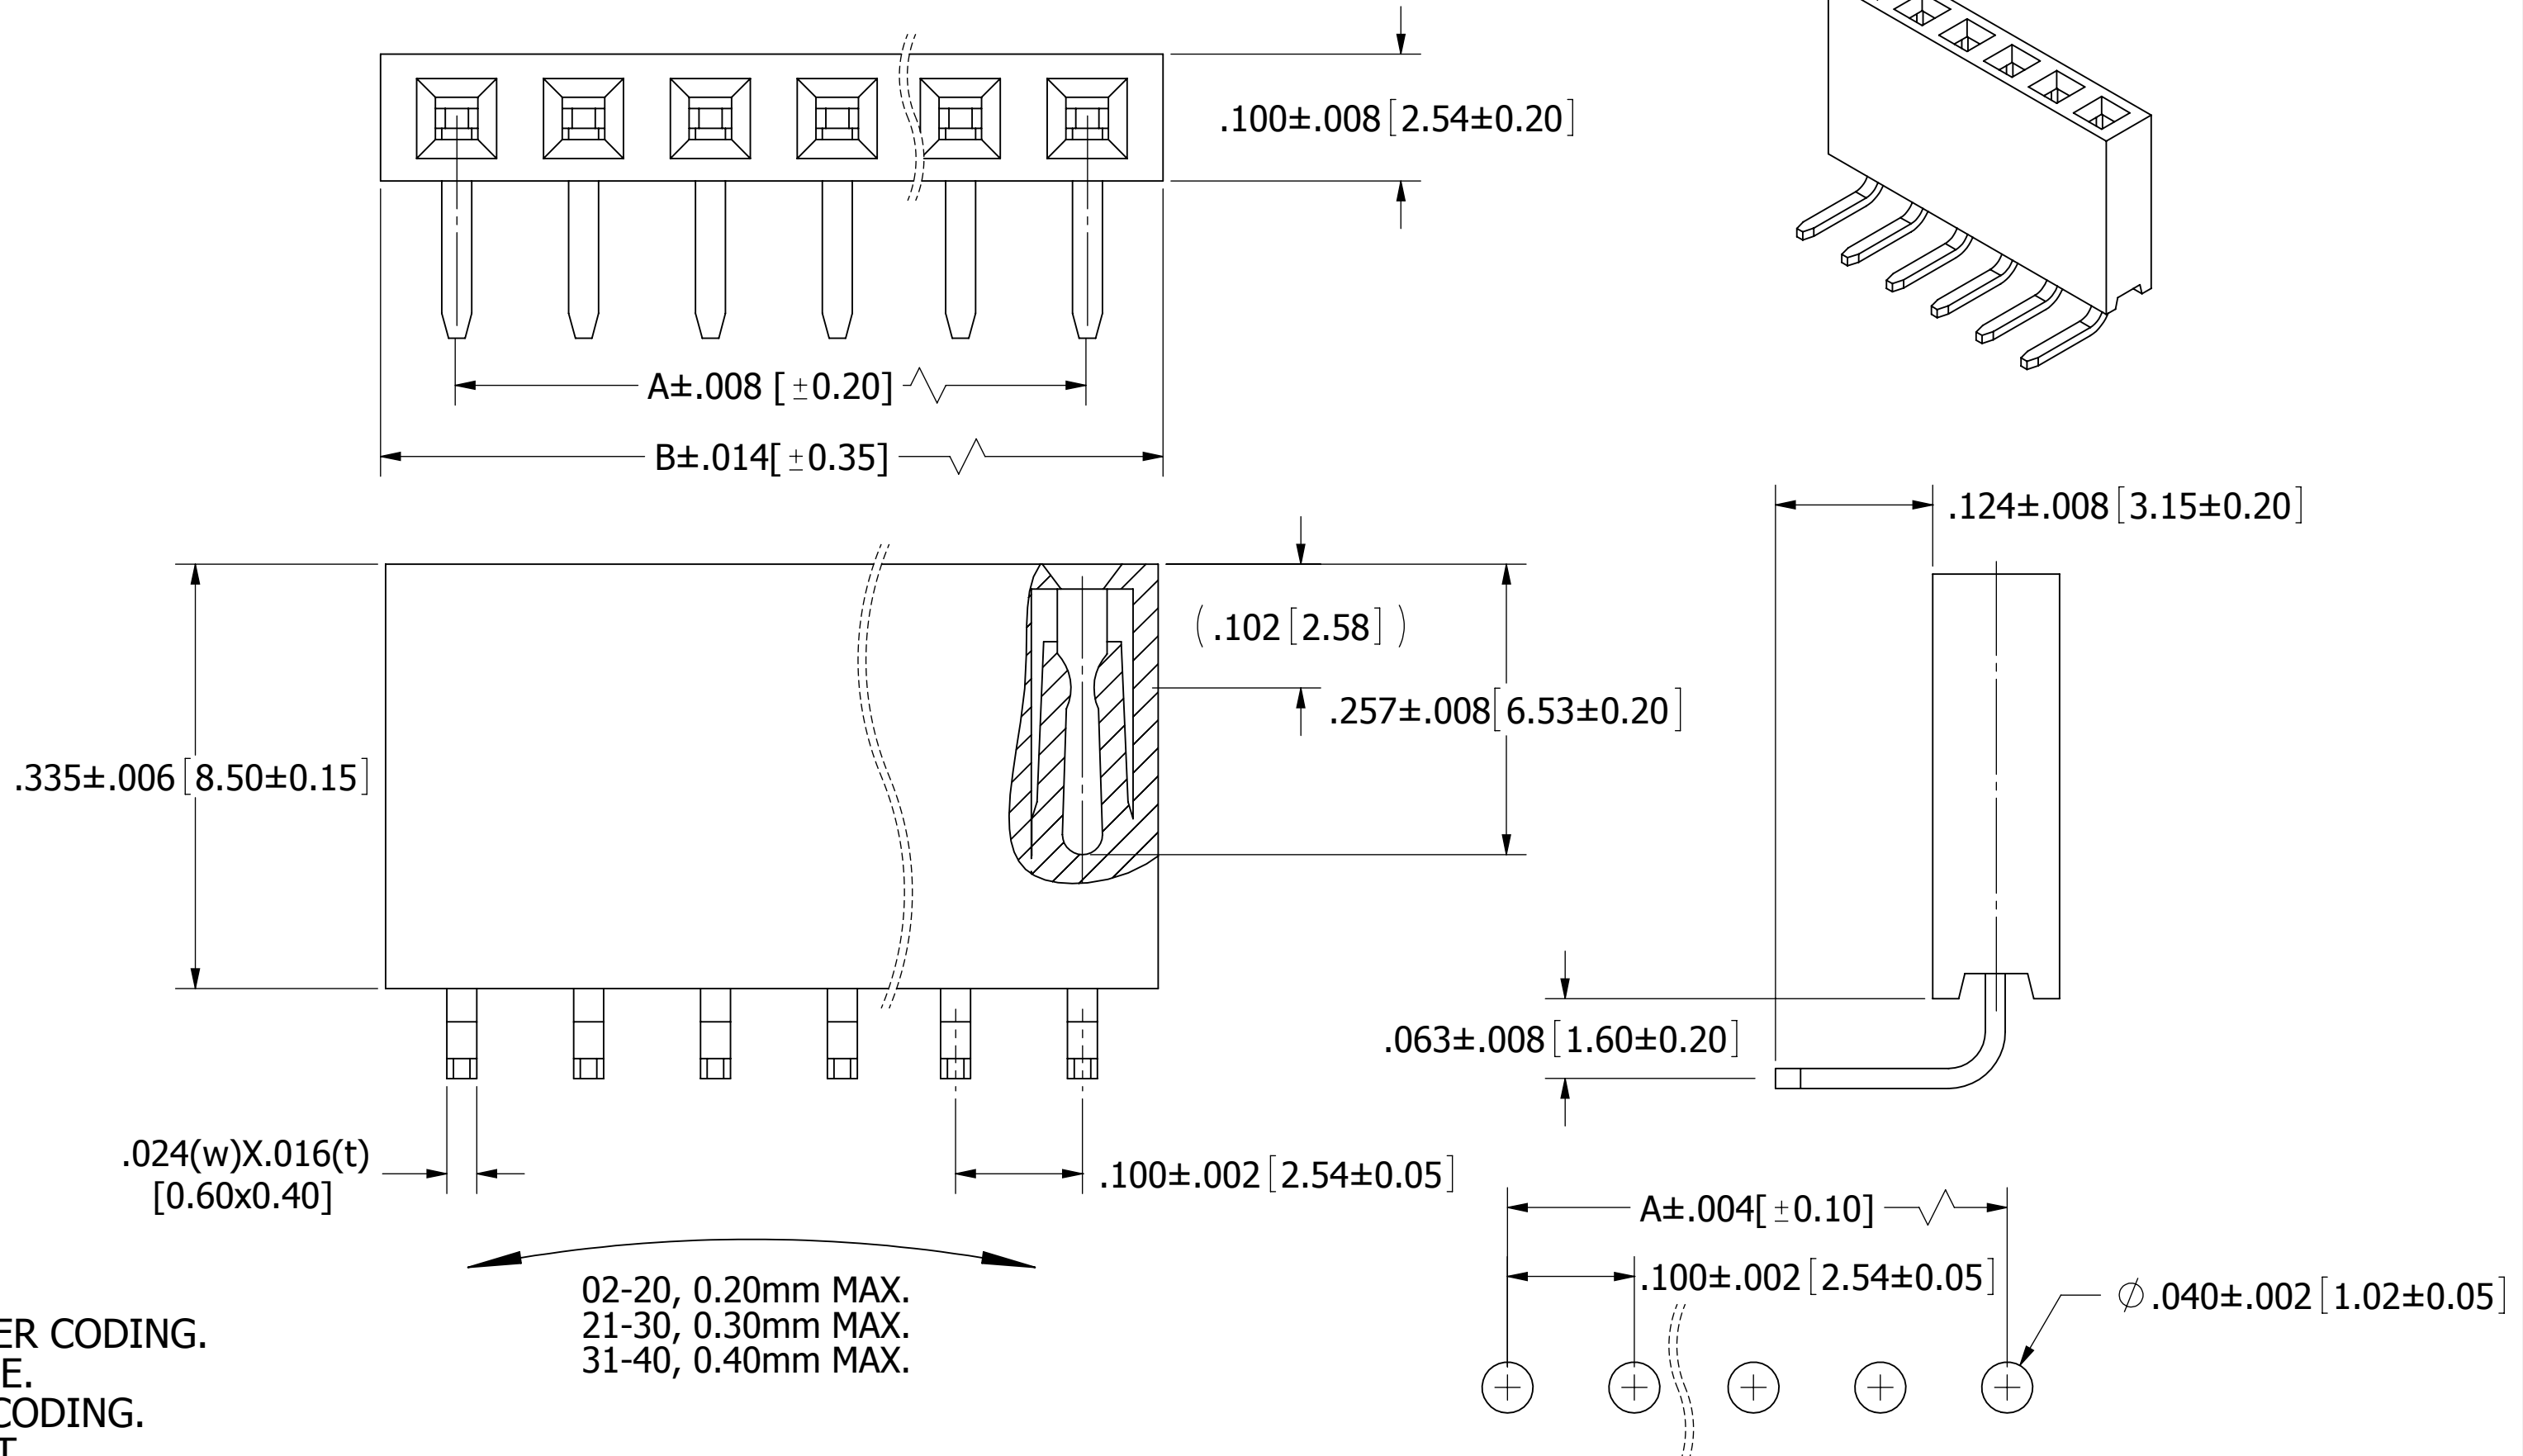

- NOTES:**
- INSULATOR MATERIAL: SEE PART NUMBER CODING.
 - CONTACT MATERIAL: PHOSPHOR BRONZE.
 - CONTACT PLATING: SEE PART NUMBER CODING.
 - CURRENT RATING: 3 AMPS PER CONTACT.
 - VOLTAGE RATING: 250V AC/DC
 - INSULATOR RESISTANCE: 5000 MEGOHMS MIN.
 - CONTACT RESISTANCE: 20 MILLIOHMS MAX.
 - DIELECTRIC WITHSTANDING: 500V AC.
 - OPERATING TEMPERATURE: -40° C TO +105° C.
 - *PROCESSING TEMPERATURE: SEE PART NUMBER CODING.
 - MATES WITH SULLINS .100 [2.54] CONTACT CENTER MALE HEADER SERIES. (.025 [0.64] SQUARE POSTS)

02-20, 0.20mm MAX.
21-30, 0.30mm MAX.
31-40, 0.40mm MAX.

RECOMMENDED PCB LAYOUT



UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM]	DRAWN	DATE	NAME	
		12/15/2008	JH	
TOLERANCES: ANGULAR: ± 5° DECIMALS .X = ± .012 [3] .XX = ± .008 [20] .XXX = ± .006 [15]	THE INFORMATION HEREIN CONTAINS PROPRIETARY INFORMATION OF SULLINS ELECTRONICS AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED TO OTHERS FOR ANY PURPOSE EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY AN OFFICER OF SULLINS ELECTRONICS.			TITLE
				HEADER FEMALE, 2.54mm CC, 1 ROW, RA
PART NUMBER				REV
xPxCxx1LGBN-RC				G
SIZE	CAGE CODE	DWG. NO.		
C	54453	10493		
SCALE: 12:1	SHEET 1 OF 1			