


REV. 4  
DCO 102710

COIL: @ 25°C	
RESISTANCE	300 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.0 VDC
MUST RELEASE	7.0 VDC MAX. 2.3 VDC MIN

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	50 g's 11 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C
NOTES:	OPERATE & RELEASE 15 MS MAX.
	OPERATE BOUNCE 5 MS MAX.
	RELEASE BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

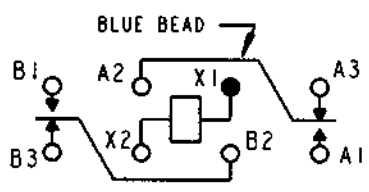

TERMINAL VIEW

CONTACT RATING:	10 AMP 28 VDC
	5 AMPS 115 VAC/400 Hz RESISTIVE
	50,000 OPERATIONS

DR. BSH 8/17/01 CK. TLG 8-20-01

**CII Technologies**  
advanced control electronic solutions

CUST. OPL	"07" RELAY
CUST. NO. M5757/23-031 REV.	

B07D932BC2-0348