

4832, solder terminal, screened, 2-pole, Audio Plug/sockets, 3.5 mm



**Description**

- Solder terminal : for cable mounting
- Audio entrances and exits
- Data and Signal transfer
- Audio Plug: 2-pole , shielded , straight

**References**

Alternative: Housing insulated [4832.1211](#); [4832.1220](#)


**Technical Data**

Diameter	3.5 mm
Number of Poles	2-pole
Ratings DC	0.5 A / 30 VDC
Ratings AC	0.5 A / 30 VAC
Dielectric Strength	500 VDC
Insulation Resistance	> 100 MΩ @ 500 VDC

Allowable Operation Temperature	-20 °C to 70 °C
Terminal	solder terminal nickel-plated
Housings	screened
Style	straight
Lifetime	5000 Insertions

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)

**Dimensions**

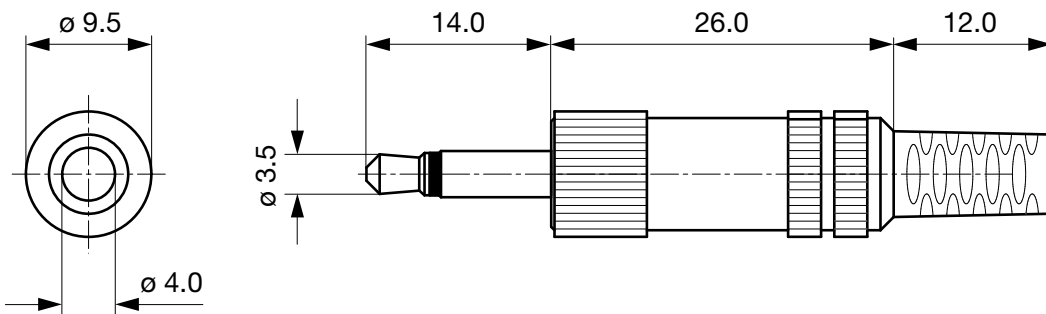

Cable diameter max. 4.0 mm

**All Variants**

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
Audio Plug/sockets	3.5	2-pole	solder terminal	<a href="#">4832.1200</a>

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

**Packaging unit** 100 Pcs

## Mating Outlets/Connectors

## Category / Description

[Audio Plug/Sockets Overview complete](#)

4832, solder terminal, screened, 2-pole, Audio Plug/Sockets, 3.5 mm	4832.2211
4832, PCB terminals, screened, 2-pole, Audio Plug/Sockets, 3.5 mm	4832.2220
4832, PCB terminals, insulated, 2-pole, Audio Plug/Sockets, 3.5 mm	4832.2230
4832, solder terminal, insulated, 2-pole, Audio Plug/Sockets, 3.5 mm	4832.3200

[Audio Plug/Sockets further types to 4832.1200](#)