


LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
CE	16					REVISED PER 0A00-0239-02	21MAR2002	TA/BE

- ① CONNECTOR ASSY: AL, SST
 BOOT: THERMOPLASTIC ELASTOMER
 STEPPED SLEEVE: BRASS/COPPER
 PLUNGER: AL
- ② STEPPED SLEEVE: Ni
- ③ BULK PACKAGED - 50 PER BULK PACK

LARGE Ø BLACK PVC TUBING
 FOR USE WITH CABLE
 JACKETS LESS THAN 2.3mm

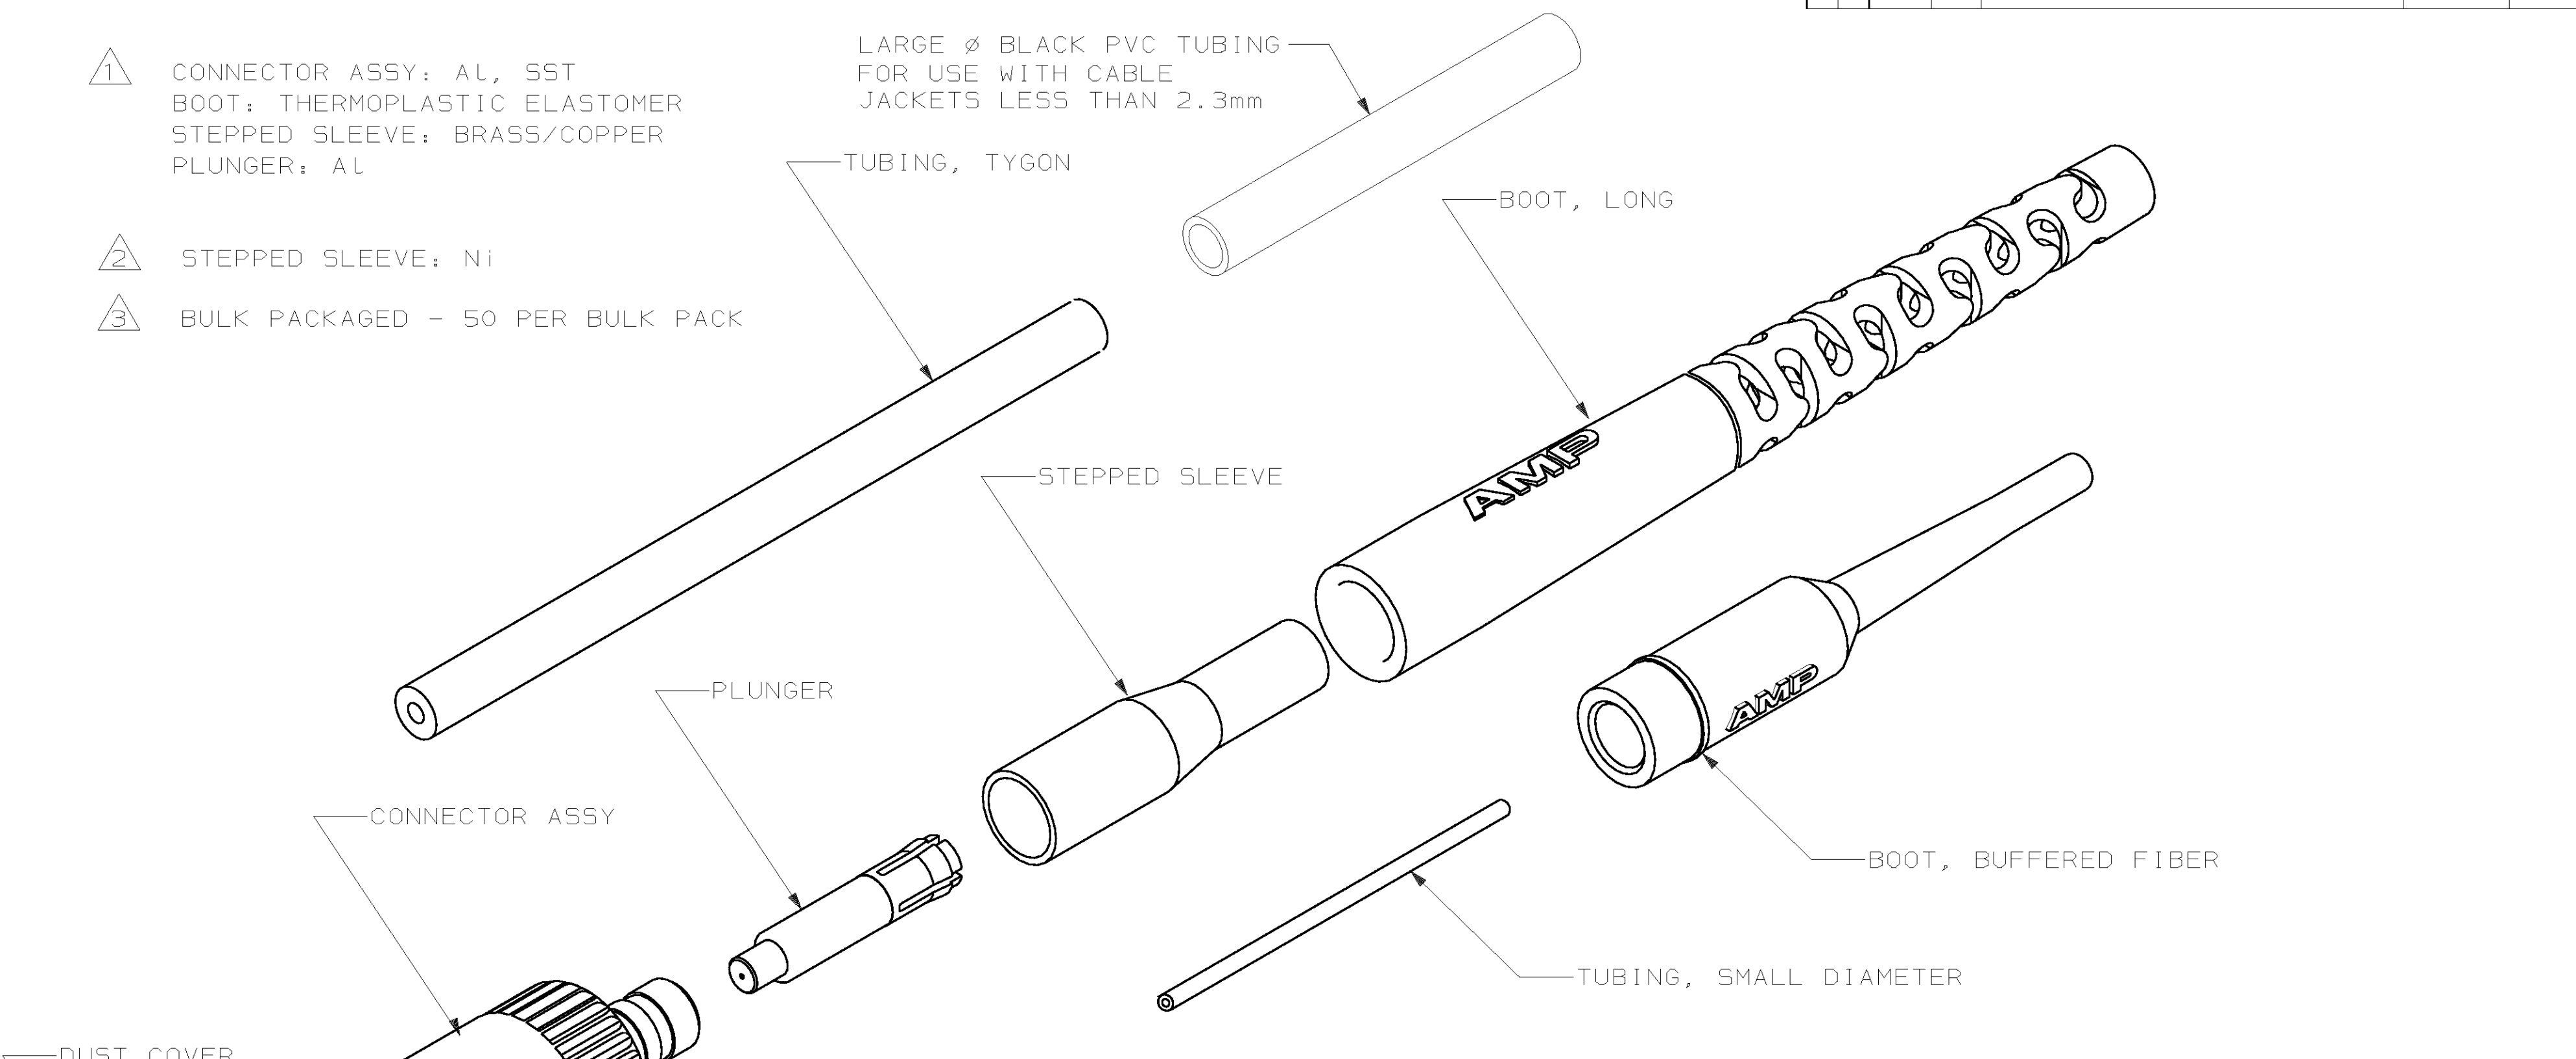

SUPERSEDED BY 504034-1	STEPPED	LONG	125µm	250µm	1-504034-4
OBSOLETE ③	STEPPED	LONG	125µm	0.9 - 1 mm	1-504034-3
OBSOLETE	-	BUFFERED FIBER	140µm	0.8 - 0.9 mm	1-504034-2
OBSOLETE	-	BUFFERED FIBER	140µm	0.9 - 1 mm	1-504034-1
SUPERSEDED BY 504034-1	-	BUFFERED FIBER	125µm	0.8 - 0.9 mm	1-504034-0
SUPERSEDED BY 504034-1	-	BUFFERED FIBER	125µm	0.9 - 1 mm	504034-9
OBSOLETE	STEPPED	LONG	140µm	500µm	504034-8
OBSOLETE	-	BUFFERED FIBER	140µm	250µm	504034-7
OBSOLETE	STEPPED	LONG	125µm	500µm	504034-6
SUPERSEDED BY 504034-1	-	BUFFERED FIBER	125µm	250µm	504034-5
OBSOLETE	STEPPED	LONG	140µm	0.8 - 0.9 mm	504034-4
OBSOLETE	STEPPED	LONG/BUFFERED	140µm	250µm/ 0.8 - 1.0 mm	504034-3
SUPERSEDED BY 504034-1	STEPPED	LONG	125µm	0.8 - 0.9 mm	504034-2
	STEPPED	LONG/BUFFERED	125µm	250µm/ 0.8 - 1.0 mm	504034-1
CRIMP SLEEVE		BOOT TYPE	FIBER SIZE	BUFFER SIZE	PART NO

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ± - 3 PLC DEC ± - ANGLES ± -	DR 8-29-92 D ERDMAN	AMP Incorporated Harrisburg, PA 17105-3608	
	CHK 8-29-92 B EDWARDS		
MATERIAL ①	APPD 9-21-92 S GRINDERSLEV	NAME KIT, CONNECTOR, SST, 2.5mm BAYONET, XTC MULTIMODE	
	APPD 8-29-92 K MONROE	SIZE C 00779	
FINISH ②	PRODUCT SPEC -	DRAWING NO C=504034	
	APPLICATION SPEC -	SCALE -	SHEET 1 OF 1
WEIGHT -			

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.