

4831, solder terminal, screened, 2-pole, Audio Plug/Sockets, 2.5 mm



Description


- Solder terminal :
Screw-on mounting , from rear-side
- Audio entrances and exits
- Data and Signal transfer
- Audio Plug: 2-pole , shielded , straight

Technical Data


Diameter	2.5 mm	Allowable Operation Temperature	-20 °C to 70 °C
Number of Poles	2-pole	Terminal	solder terminal silver plated
Ratings DC	0.5 A / 30 VDC	Mounting	Screw-on mounting wall thickness max. 1.5 mm
Ratings AC	0.5 A / 30 VAC	Housings	screened
Dielectric Strength	500VDC	Style	straight
Insulation Resistance	> 100 MΩ @ 500VDC	Lifetime	5000 Insertions

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)

Dimensions

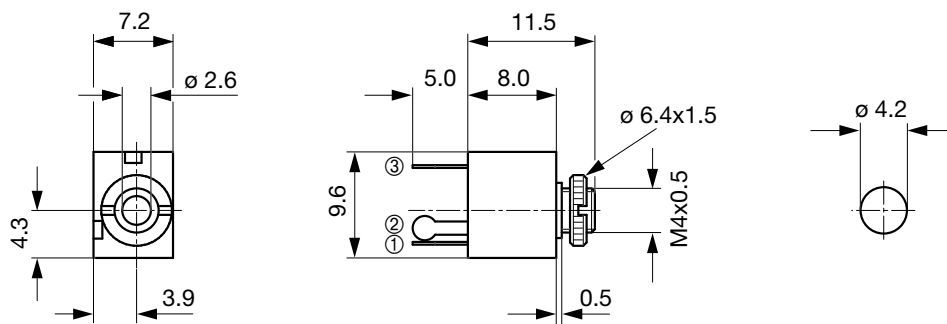

Diagrams



All Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
Audio Plug/Sockets	2.5	2-pole	solder terminal	4831.2200

Availability for all products can be searched real-time:<http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging unit 500 Pcs

Mating Inlets/Plugs

Category / Description

[Audio Plug/Sockets Overview complete](#)



4831, solder terminal, screened, 2-pole, Audio Plug/Sockets, 2.5 mm	4831.1200
4831, solder terminal, insulated, 2-pole, Audio Plug/Sockets, 2.5 mm	4831.1210
4831, solder terminal, insulated, 2-pole, Audio Plug/Sockets, 2.5 mm	4831.1220

[Audio Plug/Sockets further types to 4831.2200](#)